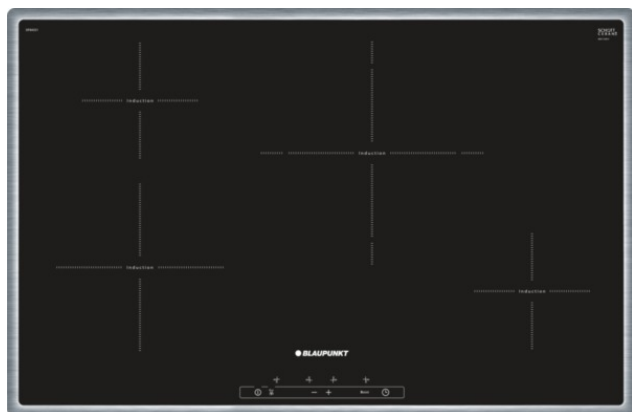# BLAUPUNKT

5IF84351
Electric cooktop
Induction hob, Glass ceramic

5IF84351 Black

- Frame design
- TouchControl MultiTouch
- Cooking zone front left:
  - 210 mm
  - 2.2 KW / 3.7 KW with Power boost
- Cooking zone rear left:
  - 145 mm
  - 1.4 KW / 2.2 KW with Power boost
- Cooking zone rear right:
  - 280 mm
  - 2.6 KW / 3.7 KW with Power boost
- Cooking zone front rigth:
  - 145 mm
  - 1.4 KW / 2.2 KW with Power boost
- 4 induction cooking zones
- no
- Power boost for all induction zones
- Electronic power control in 17 output levels.
- Electronic display
- 2 stage residual heat indicator per cooking zone
- Main switch
- Childproof lock
- Quick Start Function
- Re Start function
- Safety switch-off
- Powermanagement function
- connecting value 7400 W

4251003100945

BLAUPUNKT

5IF84351
# Electric cooktop
Induction hob, Glass ceramic

517   795
**53
518   29
          22   min. 50
780⁺²₋₀   500⁺²₋₀
*min. 40   min. 50   min. 600   ***min. 20

*   Minimum distance from
    the hob cut-out to the wall
** Recessed depth
*** With fitted oven underneath min. 30,
    possibly more; see space requirements
   for the oven
                        measurements in mm

min. 65
Drawer   min. 45
min. 20

Measurements in mm

Built-in cooker/
built-in oven
20
①

①
Ventilation gap must
be present.
Measurements in mm

min. 550

Measurements
in mm

Characteristics

Product name/family: Cooking zone ceramic
Construction type: Built-in
Energy input: Electric
Total number of positions that can be used at the same time: 4
Required niche size for installation (HxWxD): 55 x 780-780 x 500-500
Width of the product (mm): 795
Dimensions of the product (mm): 55 x 795 x 517
Net weight (kg): 15.0
Gross weight (kg): 17.0
Residual heat indicator: Separate
Location of control panel: Hob front
Basic surface material: Ceramic
Color of surface: Black, Stainless steel
Color of frame: Stainless steel
Approval certificates: AENOR, CE
Length electrical supply cord (cm): 110
Sealed Burners: No
heating with booster: All
Power of 1st heating element (kW): 2.2
Power of 2nd heating element (kW): 1.4
Power of 3rd heating element (kW): 2.6
Power of 4th heating element (kW): 1.4
Power of 1st heating element (kW in boost): 3.7
Power of 2nd heating element (kW in boost): 2.2
Power of 3rd heating element (kW in boost): 3.7
Power of 4th heating element (kW in boost): 2.2

Consumption and connection features

Electrical connection rating (W): 7400
Gas connection rating (W):
Current (A):
Voltage (V): 220-240
Frequency (Hz): 60; 50
Universal Product Code:
Main colour of product: Black
Energy input: Electric
Gas type:
Alternative gas type:
Approval certificates: AENOR, CE
Length of electrical supply cord (in):
Plug type: no plug
Required cutout/niche size for installation (in): x x
Minimum distance from counter front (in):
Minimum distance from rear wall (in):
Appliance Dimensions (h x w x d) (in): + x x
Dimensions of the packed product (in): 4.96 x 23.74 x 37.51
Net weight (lbs): 34
Gross weight (lbs): 38